ACO grease capture

Product information for the product group

ACO Product benefits

- Automatic fats, oils and grease removal into waste container
- Simple to install
- Protect inner building pipes from fats, oils and grease blockages
- Very easy to maintain
- Hygienic made from Stainless Steel
- Overflow protection
- Separation process improvement by addition of food debris removal basket

- Compact one-piece construction made from stainless steel
- Inbuilt flow reducer
- Movable inlet and outlet
- Canister or gastro container








Item Technical Data 418502.10.23.C2

Model name	Flow rate	Contents		Weight		Voltage	Plug type	Power supply	Inlet & out- let connec- tion type
		Silt basket	Grease col- lection box	Empty	Full				
	[l/s]	[1]	[1]	[kg]	[kg]				
GC100	1.0	5.2	3.8	31	78	230V/50Hz	CEE7/7	600W, 2.6A	Flexible coupling 2" (OD 48-60mm)



Dimensions

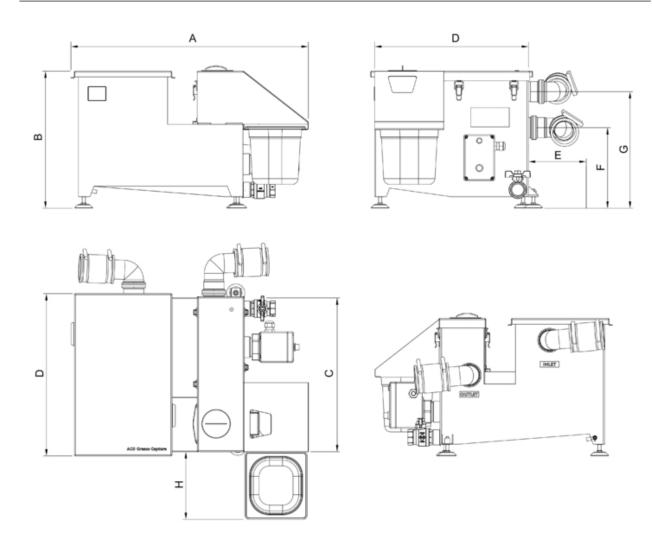

	Descrip- tion	Dimensions									Shipping dimensions		
			В	C] [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	l [mm]	w [mm]	h [mm]	
			[mm]										
418502.10.23.CQC	100	820	357	430	452	120	209	303	263	350	510	880	