ACO grease capture

Product information for the product group

ACO Product benefits

- Automatic fats, oils and grease removal into waste container
- Simple to install
- Protect inner building pipes from fats, oils and grease blockages
- Very easy to maintain
- Hygienic made from Stainless Steel
- Overflow protection
- Separation process improvement by addition of food debris removal basket

- Compact one-piece construction made from stainless steel
- Inbuilt flow reducer
- Movable inlet and outlet
- Canister or gastro container








Item Technical Data 418502.15.23.C1

Model name	Flow rate	Contents		Weight		Voltage	Plug type	Power supply	Inlet & out- let connec- tion type
		Silt basket	Grease col- lection box	Empty	Full				
	[l/s]	[1]	[1]	[kg]	[kg]				
GC150	1.5	8.3	3.8	39	114	230V/50Hz	CEE7/7	1000W, 4.3A	Flexible coupling (in D50, out D75) < br / > coupling 1,5" and 3"



Dimensions

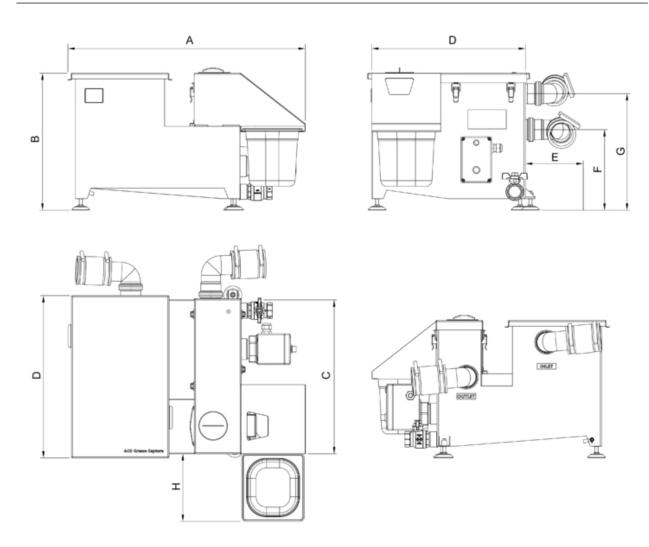

ltem num- Descri ber tion				Shipping dimensions								
		A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	l [mm]	w [mm]	h [mm]
	[۱											
418502.15.23.CGC150		1100	370	440	462	120	226	317	263	370	520	1160